




NITCO

TILES MARBLE MOSAICO



NITCO LIMITED

NITCO House, Sheth Govindram Jolly Marg,
Kanjur Marg (E), Mumbai - 400042.
Tel.: +91-22-25772800 | Fax: +91-22-67521500.

www.nitco.in | 1800 266 4826



Scan for e-Catalogue Version
Doc. No. 00.A. Printed in Dec 2025

CRESTA COLLECTION


POLISHED VITRIFIED TILES & FULL BODY

600x1200, 800x800mm & 600X600mm

2025-26

Symbols

Application

Wall Tiles 

Floor Tiles 


Finish

Glossy 

Matte 

Area


Residential Area 


Shopping Malls 

Light Commercial Area 

Technical Characteristics

Water Absorption 

Fire Resistant 

Stain Resistant 

Structured Surface 

NITCO

TILES MARBLE MOSAICO

For over 70 years, NITCO has been a leader in the surface industry, known for its innovation, quality, and sustainability. As the only global company offering Tiles, Marble, and Mosaic, we blend cutting-edge technology with nature-inspired designs, making us the preferred choice for architects, builders, and discerning clients.

NITCO's rich legacy of trust and quality has shaped some of India's most iconic buildings and townships. Recognized globally for exceptional craftsmanship and certified quality, NITCO continues to set benchmarks in the industry, with a presence in over 55 countries.

With a robust network of 650+ dealers, 9 exclusive Le Studio experience centers, and 150+ franchise stores across India and Nepal, NITCO ensures easy access to all its products. Our global footprint extends our reach, making our products a favorite among clients worldwide.

Our Offerings



Tiles:

NITCO Tiles combine precision and innovation, offering durable, globally benchmarked designs inspired by nature. They seamlessly integrate functionality and style, making them perfect for any space.

Marble:

NITCO Marble stands as a symbol of unmatched quality and exceptional durability. Our cutting-edge TRT process ensures superior resistance to stains and breakage, keeping the marble pristine and robust for years. Sourced from over 25+ countries, our curated collection features an extensive range of colors and exotics to suit every design vision. Whether you're aiming for timeless elegance or modern luxury, NITCO Marble seamlessly blends beauty with lasting performance.



Mosaic:

NITCO Mosaics bring creativity to life with customizable patterns crafted from high-quality materials. Our advanced technology and expert execution ensure stunning and precise results.



INDEX

600 X 1200mm

(Double Charge Vitrified Tiles)

Eterno White	11
Eterno Crema	12
Eterno Black	12
Hercules White	15
Hercules Crema	15
Hercules Cremini	16
Hercules Steel	16
Hercules Magenta	19
Hercules Smoke	19
Hercules Amber	20
Hercules Lava	20
Vintage White	23
Vintage Crema	23
Vintage Ebony	24

800 X 800mm

(Double Charge Vitrified Tiles)

Tropicana White	29
Tropicana Gold	29
Vintage Pearl	30

600 X 600mm

(Double Charge Vitrified Tiles)

Supreme White	34
Amazone Beige	37
Amazone Ice	37
Vintage Pearl	38
Endurance Gris	41
Endurance Nero	41
Tropicana	42
Tropicana Bianco	42
Tropicana Frost	42

Tropicana Caramel	43
Tropicana Sand	43
Tropicana Gris	43

600 X 600mm

(Full Body Vitrified Tiles)

Stanstead Smoke	47
Stanstead Gold	47
Stanstead Ebony	47
Stanstead Mist	47
Cognate Bruno	48
Cognate Ash	48
Cognate Beige	48

600 X 600mm


(Soluble Salt)

Brillo Ivory Silver	53
Harvest Cream Silver	53
Francesca Silver	53
Serpegenti Silver	53

600x 1200mm

Double Charge Vitrified Tiles

Experience the opulent look
and feel of marble,
amazing durability and
exceptional finish.

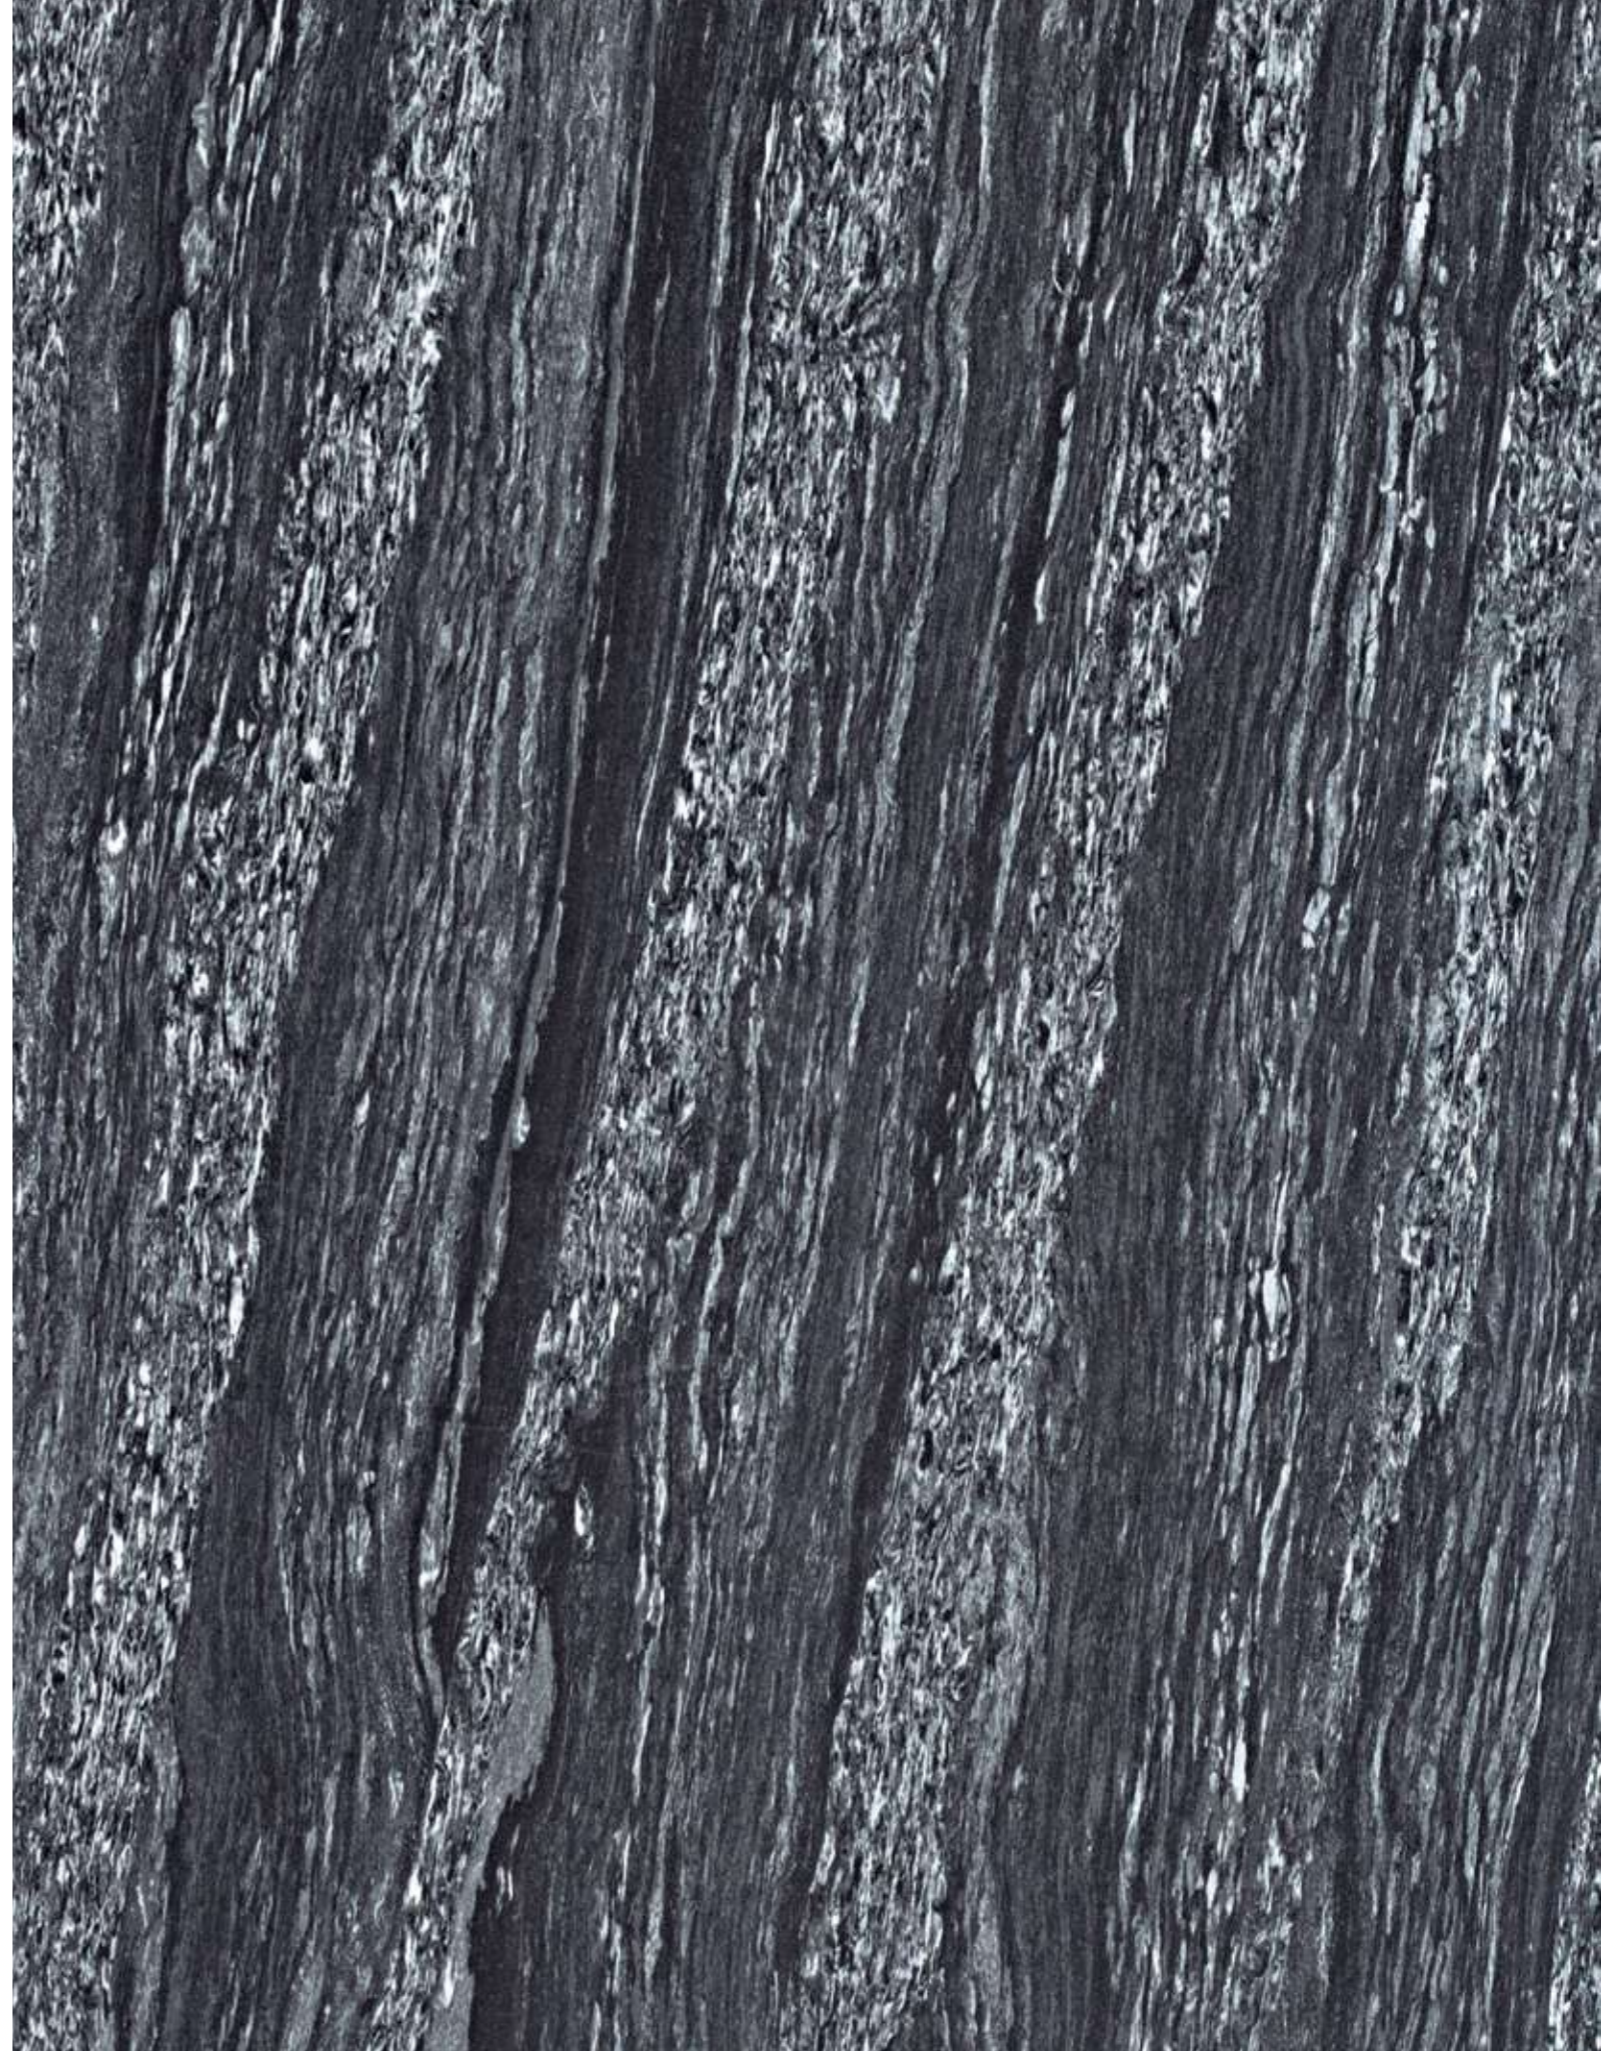



ETERNO

NITCO
TILES MARBLE MOSAICO

Eterno White



Finish: Glossy | Available in size: 600x1200mm





HERCULES

NITCO
TILES MARBLE MOSAICO

Hercules White



Hercules Crema



Finish: Glossy | Available in size: 600x1200mm



Hercules Cremini



Hercules Steel






HERCULES

NITCO
TILES MARBLE MOSAICO

Hercules Magenta

Hercules Smoke

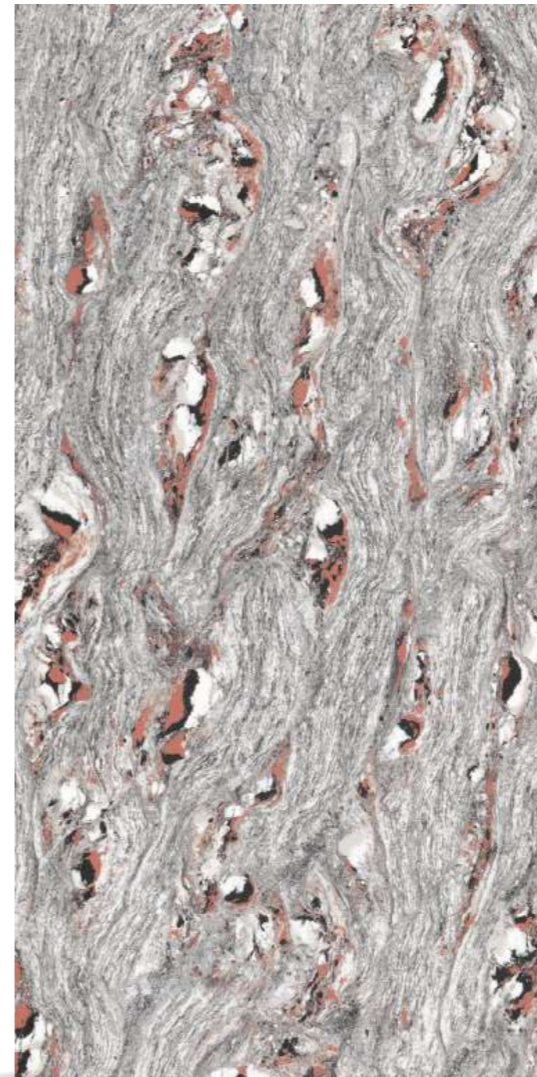

Finish: Glossy | Available in size: 600x1200mm

Hercules Amber



Hercules Lava





VINTAGE

NITCO
TILES MARBLE MOSAICO

Vintage White



Vintage Crema



Finish: Glossy | Available in size: 600x1200mm



Vintage Ebony



800x 800mm

Double Charge Vitrified Tiles

Adorn your space
with gradeur,
finesse & lifelong
durability






TROPICANA

NITCO
TILES MARBLE MOSAICO

Tropicana White




Tropicana Gold

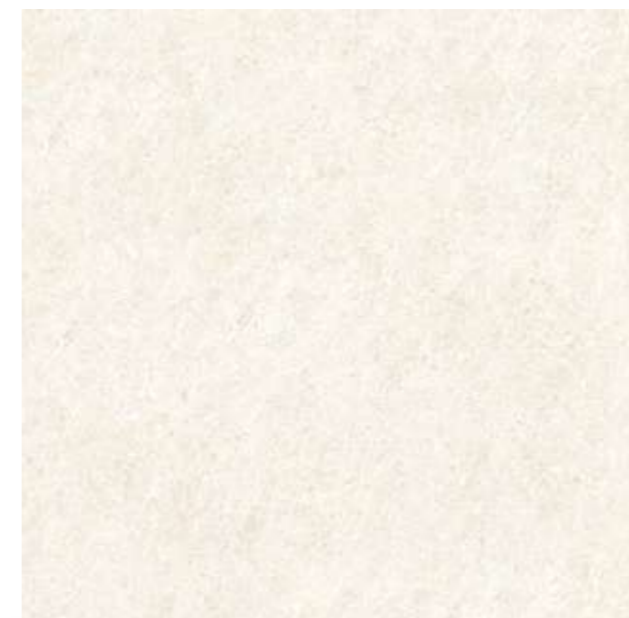

Finish: Glossy | Available in size: 800x800mm



Vintage Pearl

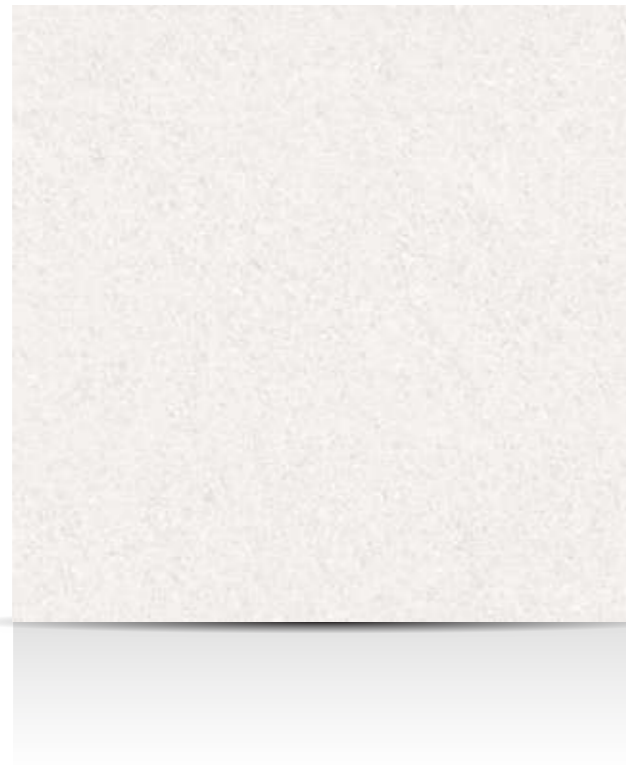


600x 600mm

Double Charge Vitrified Tiles

Elevate your environment
with grandeur, finesse,
and timeless durability



Supreme White

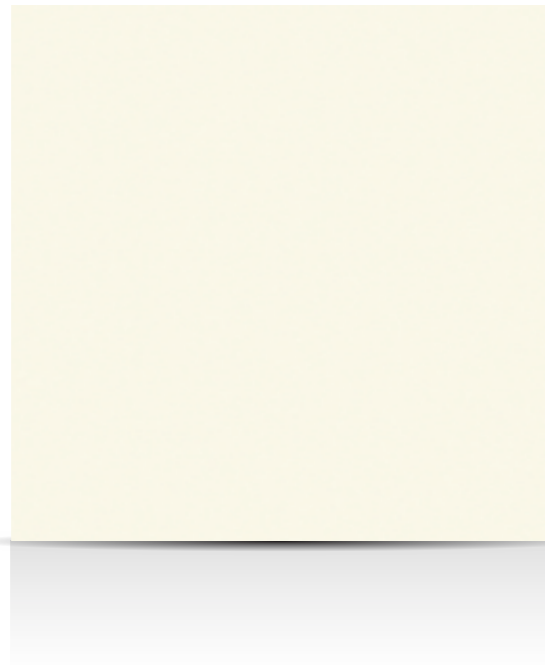



AMAZONE

NITCO
TILES MARBLE MOSAICO

Amazone Beige




Amazone Ice



Finish: Glossy | Available in size: 600x600mm



Vintage Pearl

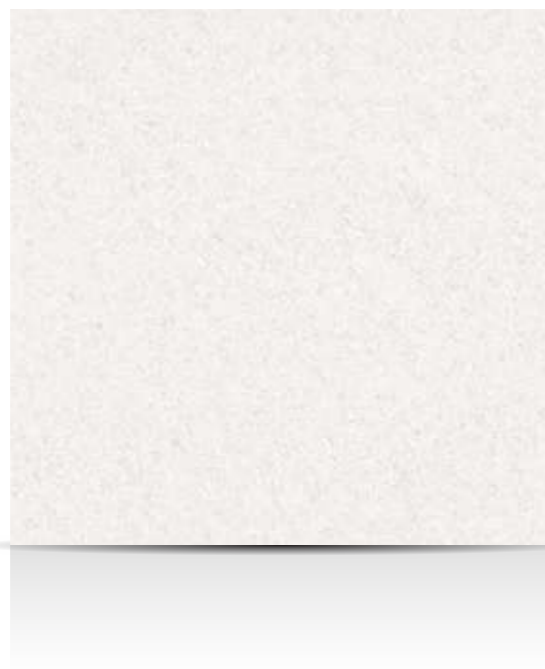



ENDURANCE

NITCO
TILES MARBLE MOSAICO

Endurance Gris



Endurance Nero



Finish: Glossy | Available in size: 600x600mm

Tropicana



Tropicana Bianco




Tropicana Caramel



Tropicana Sand



Tropicana Frost

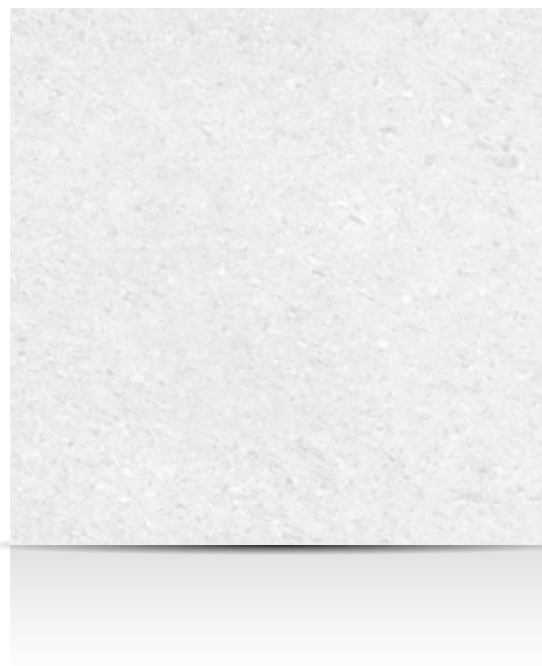

Tropicana Gris



Full Body Vitrified Tiles

600 X 600 mm

With a consistent design throughout, Full Body Vitrified Tiles are ideal for high-traffic areas, offering long-lasting performance.







STANSTEAD

NITCO
TILES MARBLE MOSAICO


Stanstead Smoke

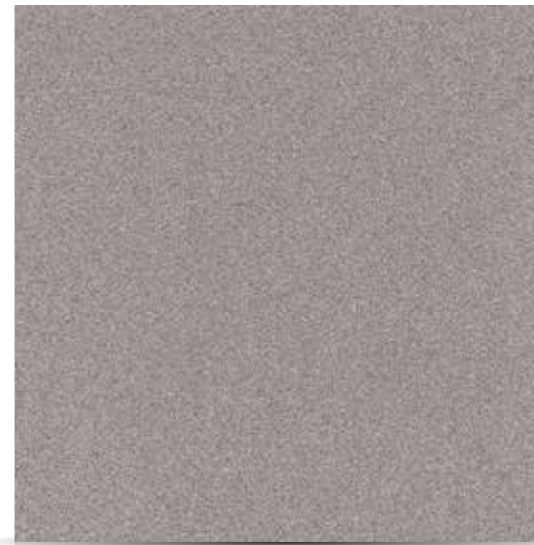

Stanstead Gold

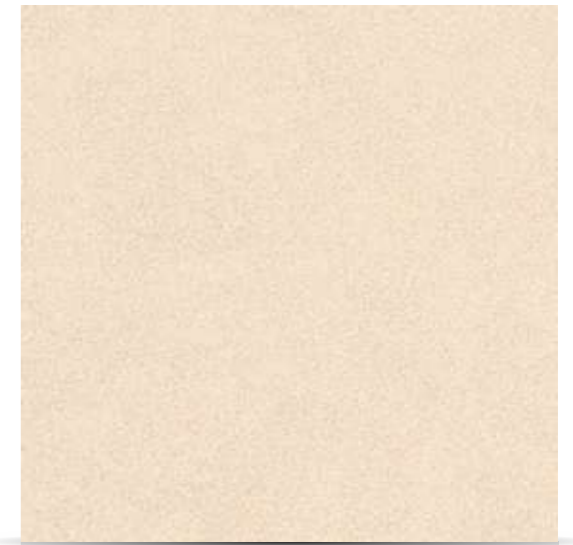

Stanstead Ebony

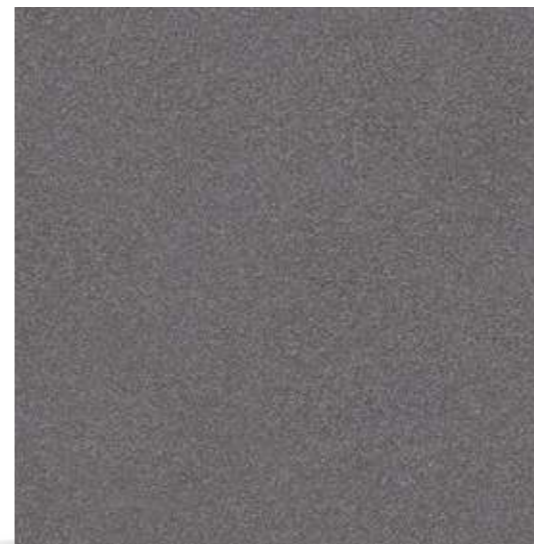


Stanstead Mist



Finish: Matte | Available in size: 600x600mm




Cognate Bruno

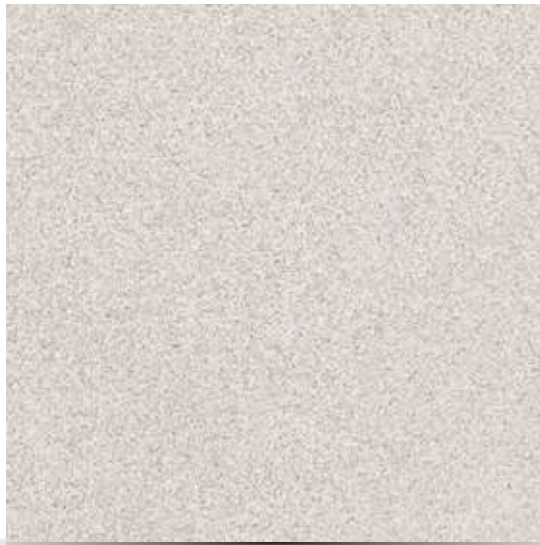

Cognate Ash



Cognate Beige

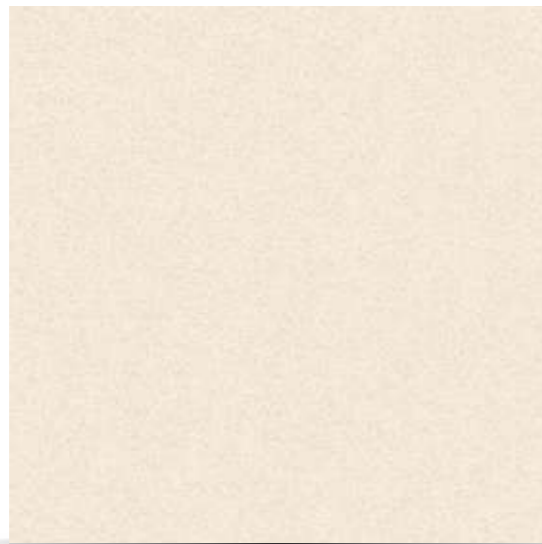

Soluble Salt

600 X 600 mm


A perfect size for your floor
and beautiful designs.





SOLUBLE SALT

Brillo Ivory Silver



Harvest Cream Silver



Francesca Silver



Serpegenti Silver



Finish: Glossy | Available in size: 600x600mm



Experience Centers

Kanjurmarg

Nitco House, Seth Govindram jolly marg, opposite Royal park, Nehru Nagar, Kanjurmarg East, Mumbai, Maharashtra 400042

Worli

Asphalt Compound, Recondo Compound, Sudam Kalu Ahire Marg, inside Municipal Building, Hanuman Nagar, Worli, Mumbai, Maharashtra 400030

Bangalore

Shop No 2, Union St, off Infantry Road, near Medinova Diagnostic Centre, Shivaji Nagar, Bengaluru, Karnataka 560001

Cochin

Shop No 50/390 B & C, Madhushila Chamber, Palace Road, Junction, NH544, nearby Metro Pillar No 435, Edappally, Kochi, Kerala 682024

Delhi

Building No, PN B1/A15, opposite Metro Pillar No 338 A, Block B1, Block E, Mohan Cooperative Industrial Estate, Badarpur, New Delhi 110044

Kolkata

Arcadia Center, 4th Floor, 31 - Dr. Ambedkar Sarani, Topsia, Kolkata, West Bengal 700046

Chennai

Vairam Complex, Commercial Complex, DN 112, Third, Sir Thyagaraya Rd, nearby Globus, T. Nagar, Chennai, Tamil Nadu 600017

Secunderabad

Shop No 107, Second Floor, Jain Estate, Park Ln, opposite Nanking Restaurant, Kalasiguda,, Secunderabad, Hyderabad, Telangana 500003

Chandigarh (Panchkula)

NITCO Ltd. sco 367, first floor sector 8, panchkula, Haryana 134109

Franchise Stores



Call to locate
a store near you

1800 266 4826

OR

Scan to locate
a store near you



TECHNICAL SPECIFICATION OF VITRIFIED TILES (DOUBLE CHARGE)

SR. NO	PROPERTIES	STANDARD TEST METHOD	ISO 13006:2018 SPECIFICATION BIA	NITCO VALUE 800X800 mm 600X600 mm
01	Deviation in Length %	ISO:10545-2	± 0.3 % (Max ± 1.0 mm)	± 0.1%
02	Deviation in Thickness %	ISO:10545-2	± 5.0% (Max ± 0.5 mm)	± 5.0%
03	Straightness of Edge %	ISO:10545-2	± 0.3 % (Max ± 0.8mm)	± 0.10%
04	Diagonal Variation % (Rectangularity)	ISO:10545-2	± 0.3 % (Max ± 1.5 mm)	± 0.10%
05	Surface flatness	ISO:10545-2	± 0.4 % (Max ± 1.8 mm)	
	a. Centre curvature			± 0.15% ± 0.20%
	b. Edge curvature			± 0.20%
	c. Warpage			± 0.15% ± 0.20%
06	Surface Quality	ISO 10545 - 2	Min 95% free from any visible defects	Min 95% free from any visible defects
07	Water Absorption % By WT.	ISO 10545 - 3	< 0.5	< 0.08
08	Breaking Strength, N	ISO 10545-4	Min. 1300 N	Min. 1300 N
09	Modulus of Rupture in N / mm ²	ISO 10545-4	> 35	> 35
10	Thermal Shock Resistance	ISO 10545 - 9	No Visible Defects	Resistant
11	Chemical Resistance (Except HF Acid)	ISO 10545 - 13	Manufacture To State Class	Resistant
12	Resistance To Stain	ISO 10545 - 14	Manufacture To State Class	Resistant
13	Gloss Value		Min 75	> 80

TECHNICAL SPECIFICATION OF VITRIFIED TILES (SOLUBLE SALT)

SR. NO	PROPERTIES	STANDARD TEST METHOD	ISO 13006:2018 SPECIFICATION BIA	NITCO VALUE
01	Deviation in Length %	ISO:10545-2	± 0.3 % (Max ± 1.0 mm)	± 0.1%
02	Deviation in Thickness %	ISO:10545-2	± 5.0% (Max ± 0.5 mm)	± 5.0%
03	Straightness of Edge %	ISO:10545-2	± 0.3 % (Max ± 0.8mm)	± 0.10%
04	Diagonal Variation % (Rectangularity)	ISO:10545-2	± 0.3 % (Max ± 1.5 mm)	± 0.10%
05	Surface flatness	ISO:10545-2	± 0.4 % (Max ± 1.8 mm)	
	a. Centre curvature			± 0.20%
	b. Edge curvature			± 0.20%
	c. Warpage			± 0.20%
06	Surface Quality	ISO 10545 - 2	Min 95% free from any visible defects	Min 95% free from any visible defects
07	Water Absorption % By WT.	ISO 10545 - 3	< 0.5	< 0.08
08	Breaking Strength, N	ISO 10545-4	Min. 700 N	Min. 1000 N
09	Modulus of Rupture in N / mm ²	ISO 10545-4	> 35	> 35
10	Thermal Shock Resistance	ISO 10545 - 9	No Visible Defects	Resistant
11	Chemical Resistance (Except HF Acid)	ISO 10545 - 13	Manufacture To State Class	Resistant
12	Resistance To Stain	ISO 10545 - 14	Manufacture To State Class	Resistant
13	Gloss Value		Min 60	> 70

TECHNICAL SPECIFICATION OF FULL BODY 600 X 600 MM (FULL BODY)

SR. NO	PROPERTIES	STANDARD TEST METHOD	ISO 13006:2018 SPECIFICATION BIA	NITCO'S VALUE
01	Deviation in Length & Width	ISO 10545-2	± 0.3% (Max 1.0mm)	± 0.10%
02	Deviation in Thickness	ISO 10545-2	± 5.0% (Max 0.5mm)	± 5.0%
03	Straightness of sides	ISO 10545-2	± 0.3% (Max 0.8mm)	± 0.1%
04	Rectangularity	ISO 10545-2	± 0.3% (Max 1.5mm)	± 0.15%
05	Surface flatness			
	a. Centre Curvature	ISO 10545-2	± 0.4% (Max 1.8mm)	± 0.2%
	b. Edge curvature	ISO 10545-2	± 0.4% (Max 1.8mm)	± 0.2%
	c. Warpage	ISO 10545-2	± 0.4% (Max 1.8mm)	± 0.2%
06	Surface Quality	ISO 10545-2	Min 95% free from any visible defects	> 95% free from visible defects
07	Water Absorption	ISO 10545-3	Avg.≤ 0.5, Ind. max 0.6	< 0.08%
08	Modulus of Rupture, MOR (N/mm ²)	ISO 10545-4	≥ 35	> 35
09	Breaking Strength, N	ISO 10545-4	≥ 1300	> 1500
10	Resistance to Deep Abrasion Volume of material removed mm ³	ISO 10545-6	Max 175	< 140
11	Thermal Shock Resistance	ISO 10545-9	No visible defects	Resistant
12	Resistance to Acid, Alkalies and Chemicals (Except HF)	ISO 10545-13	Manufacture To State Class	Resistant
13	Resistance to Staining	ISO 10545-14	Manufacture To State Class	Resistant

TECHNICAL SPECIFICATION OF 600 X 1200 MM (DOUBLE CHARGE)

SR. NO	PROPERTIES	STANDARD TEST METHOD	ISO 13006:2018 SPECIFICATION BIA	NITCO'S VALUE	
				1200mm side	600mm side
01	Deviation in Length & Width	ISO 10545-2	± 0.3% (Max 1.0mm)	± 0.08%	± 0.10%
02	Deviation in Thickness	ISO 10545-2	± 5.0% (Max 0.5mm)	± 4.0%	
03	Straightness of sides	ISO 10545-2	± 0.3% (Max 0.8mm)	± 0.06%	± 0.10%
04	Rectangularity	ISO 10545-2	± 0.3% (Max 1.5mm)	± 0.1%	± 0.10%
05	Surface flatness				
	a. Centre Curvature	ISO 10545-2	± 0.4% (Max 1.8mm)	± 0.13%	± 0.20%
	b. Edge curvature	ISO 10545-2	± 0.4% (Max 1.8mm)	± 0.15%	± 0.20%
	c. Warpage	ISO 10545-2	± 0.4% (Max 1.8mm)	± 0.13%	± 0.20%
06	Surface Quality	ISO 10545-2	Min 95% free from any visible defects	> 95% free from visible defects	
07	Water Absorption % by WT.	ISO 10545-3	≤ 0.5 % Individual maximum 0.6 %	< 0.08%	
08	Modulus of Rupture, MOR (N/mm ²)	ISO 10545-4	Minimum 35	> 35	
09	Breaking Strength, N	ISO 10545-4	≥ 1300	> 1300	
10	Deep Abrasion Resistance	ISO 10545-6	< 175 mm ³	< 140 mm ³	
11	Thermal Shock Resistance	ISO 10545-9	No Visible Defects	Resistant	
12	Chemical Resistance (Except HF Acid)	ISO 10545-13	Manufacture To State Class	Resistant	
13	Resistance to Staining	ISO 10545-14	Manufacture To State Class	Resistant	
14	Gloss Value		Min 75	>80	

PACKING DETAILS OF VITRIFIED TILES

Sr. No.	Dimensions	Tiles / Box	Coverage Area	
			Sq. Mts.	Sq. Feet
1	600 mm x 1200 mm (24" x 48")	2	1.44	15.50
2	800 mm x 800 mm (32" x 32")	3	1.92	20.67
3	600 mm x 600 mm (24" x 24")	4	1.44	15.50

The reproduction of tiles in this catalogue is restricted to four colour printing only and tiles are not relative in sizes. Conforming to ISO requirements, technical specifications of NITCO tiles are applicable only for first grade/first quality wall tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Price category & PEI grade may change without any notice. Customer are advised to confirm it before placing order.